

永恆環保機械有限公司 Wingbest Machinery Ltd

Automatic hydraulic Waste Paper Baling Press System

Model type : ME-180


Suitable for large wasted paper recycle field (handling for miscellaneous paper, newspaper,

paper, magazine)

Configuration : RF-650 Conveyor Belt / High Speed Inlet Stirring

Paper System / Automatic Wire-Tie System


----This system only needs one forklift driver to achieve the following production output goal.



The Main function include:

- Control Panel adopts PLC computer system can be chosen between automatic & manual operation, it is simple and easy control, safety and reliability.
- The errors & recovery signal can be shown clearly on dabbing type screen, those protective functions should avoided operation mistake and increase M/C life time.
- The full-automatic / manual RF650 conveyer belt adopts high load strength belt & install anti-slip flat plate.
- In order to increase life time, the paper jam / the shear obstacle device has designed to recover automatically which can be made the production running fast & smooth.
- All kind wasted paper material can be selected suitable range for bale size & weight in compressing channel by customers.
- **The automatic wire-tie system adopts high strength TB0165AT case. The wire length counter can be set for selecting material to reduce wire knots and save wire consumption**
- Dispose high-speed Stirring propeller machine which can be made the wasted paper distribute evenly in compressing channel. It can be increased the bale density & weight.
- With lower noise design to operate the higher turbo flow, the high flow can increase the utility conversion of main baler speed; the advantage of baler has saved energy, time, manpower, space area and rapid production.
- Can install the inlet separating system for large wasted paper recycle field which bale especially deal with miscellaneous paper, newspaper, paper, magazine etc.

ME-180 Bale Size: 1.1W x 1.1H x 1.6L (adjustable)

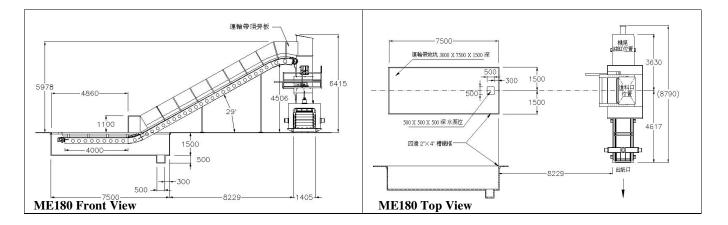

香港廠:新界元朗洪水橋田心路 17號 A

17A Tin Sam Road, Hung Shui Kiu, Yuen Long, HK

Tel: 2445 3555 Fax: 2146 1126

Web Site: www.wingbest.com.hk

國內廠:中國東莞市虎門鎮樹田村富安工業區

M/C Size: 8800 L x 4000 W x 6400 H(mm)

電話: 769-8555 5533/ 8555 4282

傳真: 769-8555 6826

網址:www.wingbest.com.cn



Characteristic of the ME-180 Baling Press:

Main Motor	100HP/380V/50HZ	3PH	2 sets
Conveyor belt Motor	10HP/380V/50HZ	3РН	1 set
Stirring paper motor	30HP/380V/50HZ	3PH	1 set
Oil Pressure Pump	Main oil pressure blade pump (92 liter/min)		2 sets
	Auxiliary oil pressure blade pump (162 liter/min)		2 sets

Hydraulic pressure motor Wire tie case TB0165AT 1 unit

Working Pressure 225kg/cm
Main Pressing Power 138,000kgf

Hydraulic Cylinder Main hydraulic cylinder § 280x2250mm 1 piece

Wire pulling hydraulic cylinder \$ 50x1550mm 2 piece Wire cut hydraulic cylinder ∮ 60x40mm 1 piece Paper cut hydraulic cylinder \$ 100x460mm 1 piece Stirring propeller hydraulic cylinder \$ 50x1080mm 2 pieces Movable plate of inlet hydraulic cylinder \$ 50x630mm 2 pieces Compress trough hydraulic cylinder \$ 200x120mm 3 pieces

Hydraulic Oil AW68 of petroleum

Capacity of the fuel tank 2400 liters (please keep oil level on upper limit for normal condition)

Max Oil Temp. >65°C (over 65°C would be alerted by alarm signal)

Bale Size (mm) 1100Wx 1100Hx 1600L(adjustable)
Bale Weight Approx. 1060 kg ±5% (carton)

Bale Speed 23-32 ton/hr

Wire Diameter Spec. 2.8-3.2mm (2 times wire special treatment, 5 straps of bale tie)

The Roll Of Wire Spec. 720mm external dia. \times 500mm internal dia.

(need to hold 10 rolls before operation)

香港廠:新界元朗洪水橋田心路 17 號 A 國內廠:中國東莞市虎門鎭樹田村富安工業區

17A Tin Sam Road, Hung Shui Kiu, Yuen Long, HK 電話: 769-8555 5533/ 8555 4282

 Tel: 2445 3555
 Fax: 2146 1126
 傳真: 769-8555 6826

 Web Site: www.wingbest.com.hk
 網址: www.wingbest.com.cn



永恆環保機械有限公司 Wingbest Machinery Ltd

Automatic hydraulic Waste Paper Baling Press System


Model type : ME-180S

> Suitable for large wasted paper recycle field (handling for miscellaneous paper, newspaper,

paper, magazine)

Configuration : RF-650 Conveyor Belt / Automatic Wire-Tie System

----This system only needs one forklift driver to achieve the following production output goal.




The Main function include:

- Control Panel adopts PLC computer system can be chosen between automatic & manual operation, it is simple and easy control, safety and reliability.
- The errors & recovery signal can be shown clearly on dabbing type screen, those protective functions should avoided operation mistake and increase M/C life time.
- The full-automatic / manual RF650 conveyer belt adopts high load strength belt & install anti-slip flat plate.
- In order to increase life time, the paper jam / the shear obstacle device has designed to recover automatically which can be made the production running fast & smooth.
- All kind wasted paper material can be selected suitable range for bale size & weight in compressing channel by customers.
- The automatic wire-tie system adopts high strength TB0165AT case. The wire length counter can be set for selecting material to reduce wire knots and save wire consumption
- With lower noise design to operate the higher turbo flow, the high flow can increase the utility conversion of main baler speed; the advantage of baler has saved energy, time, manpower, space area and rapid production.
- The suction inlet system can be chosen by customers. The baler is especially suitable for Printing Factory to handle the wasted paper edges; it is fully automatically to make the workshop without rubbish & dust.

ME-180S Bale Size: 1.1W x 1.1H x 1.6L (adjustable)

	, , ,			, ,
Output / hr Weight / Bale	32t / hr Miscellaneous Paper 1180kg ± 5%	32t / hr Newspaper 1180kg ± 5%	23t / hr Paper 1060kg ± 5%	30t / hr Magazine 1270kg ± 5%

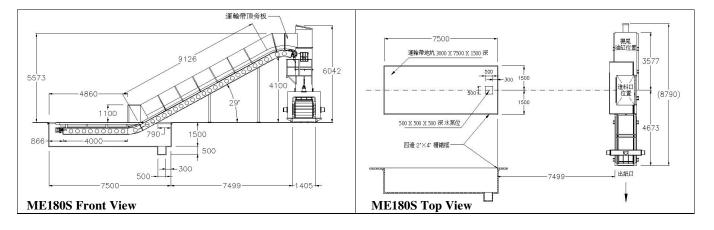

香港廠:新界元朗洪水橋田心路 17 號 A

17A Tin Sam Road, Hung Shui Kiu, Yuen Long, HK

Tel: 2445 3555 Fax: 2146 1126 Web Site: www.wingbest.com.hk

國內廠:中國東莞市虎門鎮樹田村富安工業區

M/C Size: 8800 L x 4000 W x 6100 H(mm)

電話: 769-8555 5533/8555 4282

傳真: 769-8555 6826

網址: www.wingbest.com.cn



Characteristic of the ME-180S Baling Press:

Main Motor	100HP/380V/50HZ	3PH	2 sets
Conveyor belt Motor	10HP/380V/50HZ	3PH	1 set
Oil Pressure Pump	Main oil pressure blade pump (92 liter/min)		2 sets

Auxiliary oil pressure blade pump (162 liter/min) 2 sets

Hydraulic pressure motor Wire tie case TB0165AT 1 unit

Working Pressure 225kg/cm Main Pressing Power 138,000kgf

Hydraulic Cylinder Main hydraulic cylinder § 280x2250mm 1 piece

Wire pulling hydraulic cylinder \$ 50x1550mm 2 piece
Wire cut hydraulic cylinder \$ 60x40mm 1 piece
Paper cut hydraulic cylinder \$ 100x460mm 1 piece
Compress trough hydraulic cylinder \$ 200x120mm 3 pieces

Hydraulic Oil AW68 of petroleum

Capacity of the fuel tank 2400 liters (please keep oil level on upper limit for normal condition)

Max Oil Temp. $>65^{\circ}$ C (over 65°C would be alerted by alarm signal)

Bale Size (mm) 1100Wx 1100Hx 1600L(adjustable)

Bale Weight Approx. 1100 kg ±5%

Bale Speed 23-32 ton/hr

Wire Diameter Spec. 2.8-3.2mm (2 times wire special treatment, 5 straps of bale tie)

The Roll Of Wire Spec. 720mm external dia. × 500mm internal dia.

(need to hold 10 rolls before operation)

香港廠:新界元朗洪水橋田心路 17 號 A 國內廠:中國東莞市虎門鎮樹田村富安工業區

17A Tin Sam Road, Hung Shui Kiu, Yuen Long, HK 電話: 769-8555 5533/ 8555 4282

Tel: 2445 3555 Fax: 2146 1126 傳真: 769-8555 6826

Web Site: www.wingbest.com.hk 網址: www.wingbest.com.cn