



永恆環保機械有限公司 Wingbest Machinery Ltd

Automatic hydraulic Waste Paper Baling Press System

Model type : ME-80

Suitable for small/medium wasted paper recycle field (handling as miscellaneous paper, newspaper, paper, plastic tape, bottle, AL tin)

Configuration : RF-650 Conveyor Belt / High Speed Inlet Stirring Paper System / Automatic Wire-Tie System

-----This system only needs one forklift driver to achieve the following production output goal.



Baler Spec	Total Power : 60Kw (80 HP)	Main Pressing Power : 93,000kgf	M/C Weight : 17400kg
	Inlet Size : 1050W x 1750L	Inlet Capacity : 1.3 M ³	Compress Weight : 440kg/M ³
	Bale Size : 1000W x 1100H x 1600L	Bale Weight (OCC) : 775kg±5%	Wire/bale : 4 wires



The Main function include :

- ◆ Control Panel adopts PLC computer system can be chosen between automatic & manual operation, it is simple and easy control, safety and reliability.
- ◆ The errors & recovery signal can be shown clearly on dabbing type screen, those protective functions should avoided operation mistake and increase M/C life time.
- ◆ The full-automatic / manual RF650 conveyer belt adopts high load strength belt & install anti-slip flat plate.
- ◆ In order to increase life time, the paper jam / the shear obstacle device has designed to recover automatically which can be made the production running fast & smooth.
- ◆ All kind wasted paper material can be selected suitable range for bale size & weight in compressing channel by customers.
- ◆ The automatic wire-tie system adopts high strength TB0165AT case. The wire length counter can be set for selecting material to reduce wire knots and save wire consumption
- ◆ Dispose high-speed Stirring propeller machine which can be made the wasted paper distribute evenly in compressing channel. It can be increased the bale density & weight.
- ◆ With lower noise design to operate the higher turbo flow, the high flow can increase the utility conversion of main baler speed; the advantage of baler has saved energy, time, manpower, space area and rapid production.
- ◆ Simple structure of baler system for medium wasted paper recycle field which bale especially deal with miscellaneous paper, newspaper, paper, magazine etc.

ME-80 Bale Size : 1.0W x 1.1H x 1.6L (adjustable)

M/C Size : 8400 L x 3800 W x 5300 H(mm)

Output / hr Weight / Bale	10.8t / hr Miscellaneous Paper 828kg ± 5%	10.8t / hr Newspaper 828kg ± 5%	8.1t / hr Carton 775kg ± 5%	19t / hr Magazine 843kg ± 5%
------------------------------	---	---------------------------------------	-----------------------------------	------------------------------------

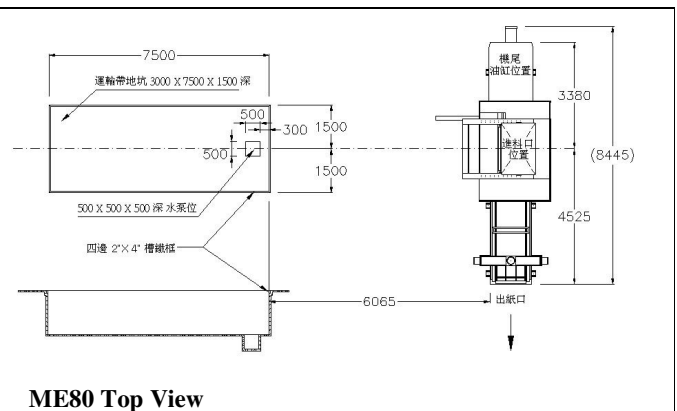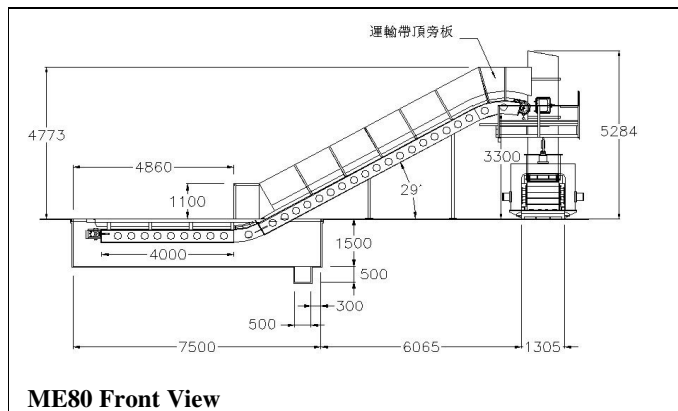

香港廠：新界元朗洪水橋田心路 17 號 A
17A Tin Sam Road, Hung Shui Kiu, Yuen Long, HK
Tel : 2445 3555 Fax : 2146 1126
Web Site : www.wingbest.com.hk

國內廠：中國東莞市虎門鎮樹田村富安工業區
電話：769-8555 5533/ 8555 4282
傳真：769-8555 6826
網址：www.wingbest.com.cn



永恆環保機械有限公司
Wingbest Machinery Ltd

Characteristic of the ME-80 Baling Press :

Main Motor	40HP/4P/380V/50HZ	3PH	2 sets
Conveyor belt Motor	7.5HP/4P/380V/50HZ	3PH	1 set
Stirring paper motor	15HP/6P/380V/50HZ	3PH	1 set
Oil Pressure Pump	Main oil pressure blade pump (92 liter/min)		2 sets
	Auxiliary oil pressure blade pump (162 liter/min)		2 sets
Hydraulic pressure motor	Wire tie case TB0165AT		1 unit
Working Pressure	225kg/cm		
Main Pressing Power	93,000kgf		
Hydraulic Cylinder	Main hydraulic cylinder	∅ 230x2100mm	1 piece
	Wire pulling hydraulic cylinder	∅ 50x1500mm	2 piece
	Wire cut hydraulic cylinder	∅ 60x40mm	1 piece
	Paper cut hydraulic cylinder	∅ 100x460mm	1 piece
	Stirring propeller hydraulic cylinder	∅ 60x850mm	1 pieces
	Compress trough hydraulic cylinder	∅ 180x120mm	3 pieces
Hydraulic Oil	AW68 of petroleum		
Capacity of the fuel tank	1400 liters (please keep oil level on upper limit for normal condition)		
Max Oil Temp.	>65°C (over 65°C would be alerted by alarm signal)		
Bale Size (mm)	1000Wx 1100Hx 1600L		
Bale Weight	Bale length 1600mm, Approx. 775 kg ±5% (Carton)		
Bale Speed	8.1 ton/hr		
Wire Diameter Spec.	2.8-3.2mm (2 times wire special treatment, 4 straps of bale tie)		
The Roll Of Wire Spec.	720mm external dia. × 500mm internal dia. (need to hold 8 rolls before operation)		

香港廠：新界元朗洪水橋田心路 17 號 A

17A Tin Sam Road, Hung Shui Kiu, Yuen Long, HK

Tel : 2445 3555 Fax : 2146 1126

Web Site : www.wingbest.com.hk

國內廠：中國東莞市虎門鎮樹田村富安工業區

電話：769-8555 5533/ 8555 4282

傳真：769-8555 6826

網址：www.wingbest.com.cn



永恆環保機械有限公司 Wingbest Machinery Ltd



Automatic hydraulic Waste Paper Baling Press System

Model type : **ME-80S**

Suitable for small/medium wasted paper recycle field (handling as miscellaneous paper, newspaper, paper, plastic tape, bottle, AL tin)

Configuration : RF-650 Conveyor Belt / Automatic Wire-Tie System

-----This system only needs one forklift driver to achieve the following production output goal.

Baler Spec	Total Power : 60Kw (80 HP)	Main Pressing Power : 93,000kgf	M/C Weight : 16300kg
	Inlet Size : 1050W x 1750L	Inlet Capacity : 1.3 M ³	Compress Weight : 440kg/M ³
	Bale Size : 1100W x 1100H x 1600L	Bale Weight (OCC) : 775kg±5%	Wire/bale : 4 wires



The Main function include :

- ◆ Control Panel adopts PLC computer system can be chosen between automatic & manual operation, it is simple and easy control, safety and reliability.
- ◆ The errors & recovery signal can be shown clearly on dabbing type screen, those protective functions should avoided operation mistake and increase M/C life time.
- ◆ The full-automatic / manual RF650 conveyer belt adopts high load strength belt & install anti-slip flat plate.
- ◆ In order to increase life time, the paper jam / the shear obstacle device has designed to recover automatically which can be made the production running fast & smooth.
- ◆ All kind wasted paper material can be selected suitable range for bale size & weight in compressing channel by customers.
- ◆ The automatic wire-tie system adopts high strength TB0165AT case. The wire length counter can be set for selecting material to reduce wire knots and save wire consumption
- ◆ With lower noise design to operate the higher turbo flow, the high flow can increase the utility conversion of main baler speed; the advantage of baler has saved energy, time, manpower, space area and rapid production.
- ◆ Simple structure of baler system for small/medium wasted paper recycle field which bale especially deal with miscellaneous paper, newspaper, paper, magazine etc.

ME-80S Bale Size : 1.0W x 1.1H x 1.6L (adjustable)

M/C Size : 8400 L x 3800 W x 4400 H(mm)

Output / hr Weight / Bale	10.8t / hr Miscellaneous Paper 828kg ± 5%	10.8t / hr Newspaper 828kg ± 5%	8.1t / hr Carton 775kg ± 5%	19t / hr Magazine 843kg ± 5%
------------------------------	---	---------------------------------------	-----------------------------------	------------------------------------

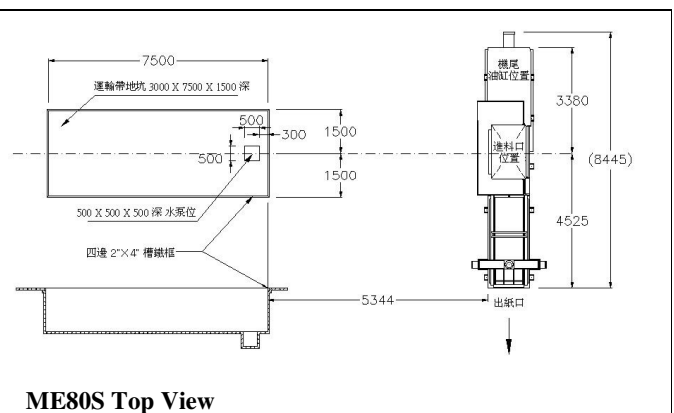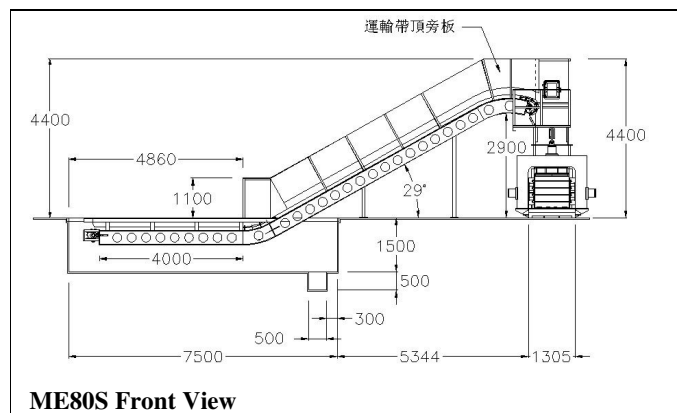

香港廠：新界元朗洪水橋田心路 17 號 A
17A Tin Sam Road, Hung Shui Kiu, Yuen Long, HK
Tel : 2445 3555 Fax : 2146 1126
Web Site : www.wingbest.com.hk

國內廠：中國東莞市虎門鎮樹田村富安工業區
電話：769-8555 5533/ 8555 4282
傳真：769-8555 6826
網址：www.wingbest.com.cn



永恆環保機械有限公司
Wingbest Machinery Ltd

Characteristic of the ME-80S Baling Press :

Main Motor	40HP/4P/380V/50HZ	3PH	2 sets
Conveyor belt Motor	7.5HP/4P/380V/50HZ	3PH	1 set
Oil Pressure Pump	Main oil pressure blade pump (92 liter/min)		2 sets
	Auxiliary oil pressure blade pump (162 liter/min)		2 sets
Hydraulic pressure motor	Wire tie case TB0165AT		1 unit
Working Pressure	225kg/cm		
Main Pressing Power	93,000kgf		
Hydraulic Cylinder	Main hydraulic cylinder	∅ 230x2100mm	1 piece
	Wire pulling hydraulic cylinder	∅ 50x1500mm	2 piece
	Wire cut hydraulic cylinder	∅ 60x40mm	1 piece
	Paper cut hydraulic cylinder	∅ 100x460mm	1 piece
	Compress trough hydraulic cylinder	∅ 180x120mm	3 pieces
Hydraulic Oil	AW68 of petroleum		
Capacity of the fuel tank	1400 liters (please keep oil level on upper limit for normal condition)		
Max Oil Temp.	>65°C (over 65°C would be alerted by alarm signal)		
Bale Size (mm)	1000Wx 1100Hx 1600L (adjustable)		
Bale Weight	Bale Length 1600mm, Approx. 775 kg ±5% (Carton)		
Bale Speed	8.1 ton/hr		
Wire Diameter Spec.	2.8-3.2mm (2 times wire special treatment, 4 straps of bale tie)		
The Roll Of Wire Spec.	720mm external dia. × 500mm internal dia. (need to hold 8 rolls before operation)		

香港廠：新界元朗洪水橋田心路 17 號 A

17A Tin Sam Road, Hung Shui Kiu, Yuen Long, HK

Tel : 2445 3555 Fax : 2146 1126

Web Site : www.wingbest.com.hk

國內廠：中國東莞市虎門鎮樹田村富安工業區

電話：769-8555 5533/ 8555 4282

傳真：769-8555 6826

網址：www.wingbest.com.cn