



V8-II small-platform , double-deck floor scale

Features : Suitable for the weighing of hoisting goods, fork-lift truck shoveling and manual transport. ( Suitable for weighing mini-vehicle loading & pit-type installation )

Max. Capacity : 0.5t , 1t , 2t , 3t , 5t , 8t , 10t

Dimension :

0.8m × 0.8m × 90mm

1.2m × 1.5m × 90mm

2m × 2m × 100mm

1m × 1m × 90mm


1.5m × 1.5m × 90mm

1.5m × 3m × 140mm

1.2m × 1.2m × 90mm

1.5m × 2m × 100mm

2m × 3m × 140mm

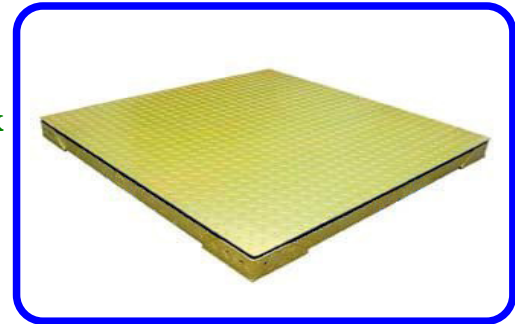

Product Features :

The patent of innovative design is adopted high-rigid strength which is high accuracy, fast weighing, steady and reliable work. If attaching devices are installed on the platform, the scale can be used on weighing equipment like bunker scale, roller scale or steel-tape scale. The scale widely used in storehouse, workshops, goods yard, pedlar market, building site, etc.

Exterior	Platform below 2 x 3m made of pattered plate
	Platform above 2 x 3m made of flat plate
	Surface of aluminum paste or spray paint orange line

Technical parameter	Accuracy	OIML III
	Weighing range	1t ~ 60t
	Safe overload	150% Max
Work temperature	Weighing indicator	-10 ~ +40 C
	Platform & load cell	-30 ~ +65 C
	Relative humidity	<95 %
Power source	Voltage	220 V AC
	Frequency	50 Hz

Weighing Indicator

Model No :	a)YH-T3 indicator	Standard supporting indicator ,Interior battery, red LED display
	b)XK3190-A9 Indicator	Standard supporting indicator ,Interior battery, red LED display and various print functions

香港廠：新界元朗洪水橋田心路 17 號 A  
17A Tin Sam Road, Hung Shui Kiu, Yuen Long, HK  
電話：2445 3555 傳真：2146 1126  
網址：www.wingbest.com.hk

國內廠：中國東莞市虎門鎮樹田村富安工業區  
電話：769-8555 5533/ 8555 4282  
傳真：769-8555 6826