




## V8-IIL Ultra-low-profile , double-deck small floor scale

Features : Ultra-low profile, 35~45mm in height.  
All stainless steel optional, suitable for the  
weighting of manual vehicle labor-saving and  
time-saving.

Max. Capacity : 500kg, 1t , 1.5t

Dimension : 0.8m × 0.8m × 35mm    1.2m × 1.2m × 45mm  
1m × 1m × 40mm                    1.5m × 1.5m × 45mm

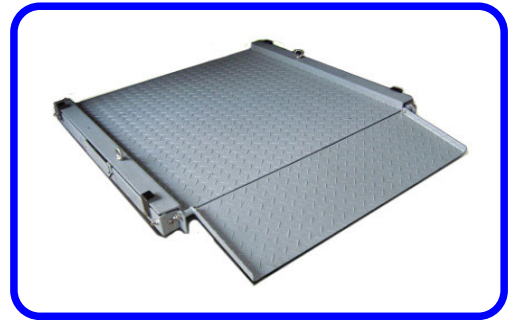

### Product Features :

The patent of innovative design is adopted high-rigid strength which is high accuracy, fast weighing, steady and reliable work. If attaching devices are installed on the platform, the scale can be used on weighing equipment like bunker scale, roller scale or steel-tape scale. The scale widely used in storehouse, workshops, goods yard, pedlar market, building site, etc.

Exterior	Platform below 2 x 3m made of pattered plate
	Platform above 2 x 3m made of flat plate
	Surface of aluminum paste or spray paint orange line

Technical parameter	Accuracy	OIML III
	Weighing range	1t ~ 60t
	Safe overload	150% Max

Work temperature	Weighing indicator	-10 ~ +40 C
	Platform & load cell	-30 ~ +65 C
	Relative humidity	<95 %

Power source	Voltage	220 V AC
	Frequency	50 Hz

### Weighing Indicator

Model No :	a)YH-T3 indicator	Standard supporting indicator ,Interior battery, red LED display
	b)XK3190-A9 Indicator	Standard supporting indicator ,Interior battery, red LED display and various print functions

香港廠：新界元朗洪水橋田心路 17 號 A  
17A Tin Sam Road, Hung Shui Kiu, Yuen Long, HK  
電話：2445 3555    傳真：2146 1126  
網址：www.wingbest.com.hk

國內廠：中國東莞市虎門鎮樹田村富安工業區  
電話：769-8555 5533/ 8555 4282  
傳真：769-8555 6826